OBJECT FIRST

Ootbi by Object First — Best Storage for Veeam™

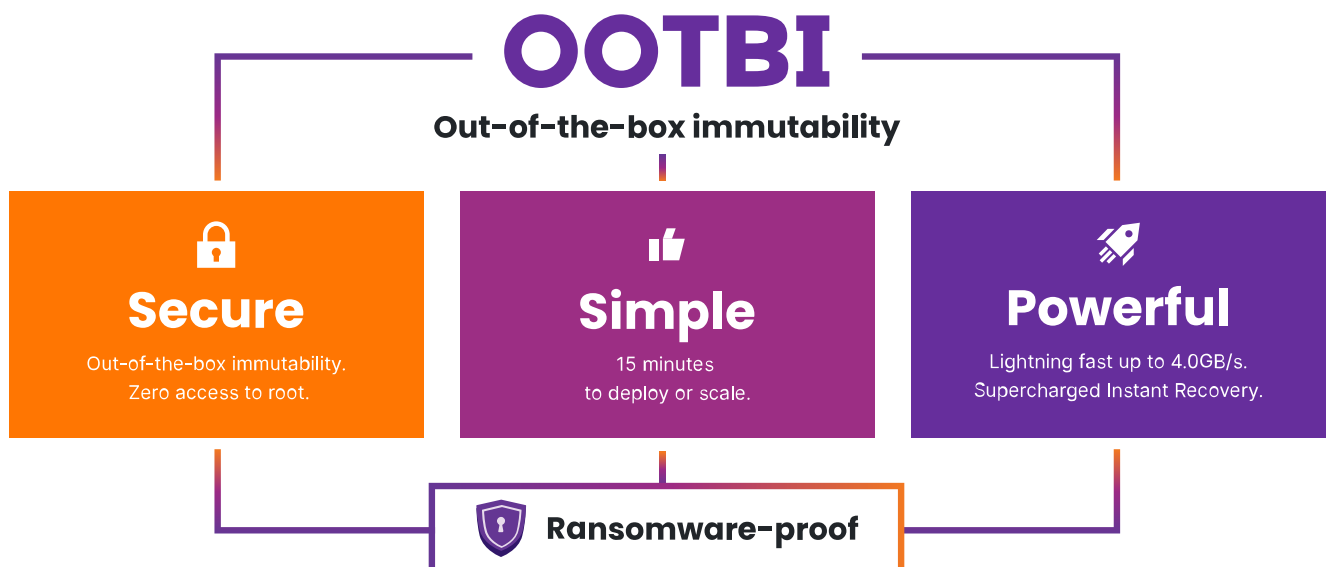## RANSOMWARE PROOF

Effortless Immutability

VEEAM READY
Object with Immutability

Out-of-the-box immutability eliminates the risk of ransomware infiltrating backup data, while a factory-hardened operating system assures data integrity.

Ransomware-proof and immutable out-of-the-box, Ootbi by Object First delivers secure, simple, and powerful backup storage for Veeam customers. The appliance can be racked, stacked, and powered in 15-minutes. Ootbi by Object First is built on immutable object storage technology designed and optimized for unbeatable backup and recovery performance. Eliminate the need to sacrifice performance and simplicity to meet budget constraints with Ootbi by Object First.

OOTBI

Out-of-the-box immutability

Secure
Out-of-the-box immutability.
Zero access to root.

Simple
15 minutes
to deploy or scale.

Powerful
Lightning fast up to 4.0GB/s.
Supercharged Instant Recovery.

Ransomware-proof

Models:	Ootbi 64TB	Ootbi 128TB
Capacity		
Usable Capacity Per Node	64 TB	128 TB
Maximum Nodes Per Cluster	4	4
Disk Arrangement		
Primary Array	10 × 8 TB SAS HDD (RAID 6)	10 × 16 TB SAS HDD (RAID 6)
Hot Spare	1 × 8 TB SAS HDD	1 × 16 TB SAS HDD
Dedicated OS Disks	2 × 240 GB SATA SSD (RAID 1)	2 × 240 GB SATA SSD (RAID 1)
Cache	1 × 1.6 TB NVMe	1 × 1.6 TB NVMe
Specifications		
Form Factor	2U Rackmount	2U Rackmount
Dimensions (W x H x D)	19” x 3.5” x 25.5”	19” x 3.5” x 25.5”
Weight	106 lbs	106 lbs
Network Interface	2 × 10GBase-T – Onboard	2 × 10GBase-T – Onboard
	2 x SFP+ 10Gb/port – Card	2 x SFP+ 10Gb/port – Card
Management	Dedicated IPMI 2.0 – RJ45	Dedicated IPMI 2.0 – RJ45
Power		
Total Output Power	1000W/1200W	1000W/1200W
	100-127Vac / 15-12A / 50-60Hz	100-127Vac / 15-12A / 50-60Hz
	200-240Vac / 8.5-7A/ 50-60 Hz	200-240Vac / 8.5-7A/ 50-60 Hz
+12V	Max: 83A / Min: 0A (100-127Vac)	Max: 83A / Min: 0A (100-127Vac)
	Max: 100A / Min: 0A (200-240Vac)	Max: 100A / Min: 0A (200-240Vac)
	Max: 100A / Min: 0A (200-240Vdc)	Max: 100A / Min: 0A (200-240Vdc)